


Executive Order G-70-186
Exhibit 2
Figure 4G

6275
(SYSTEM MONITOR VENT SENSOR)

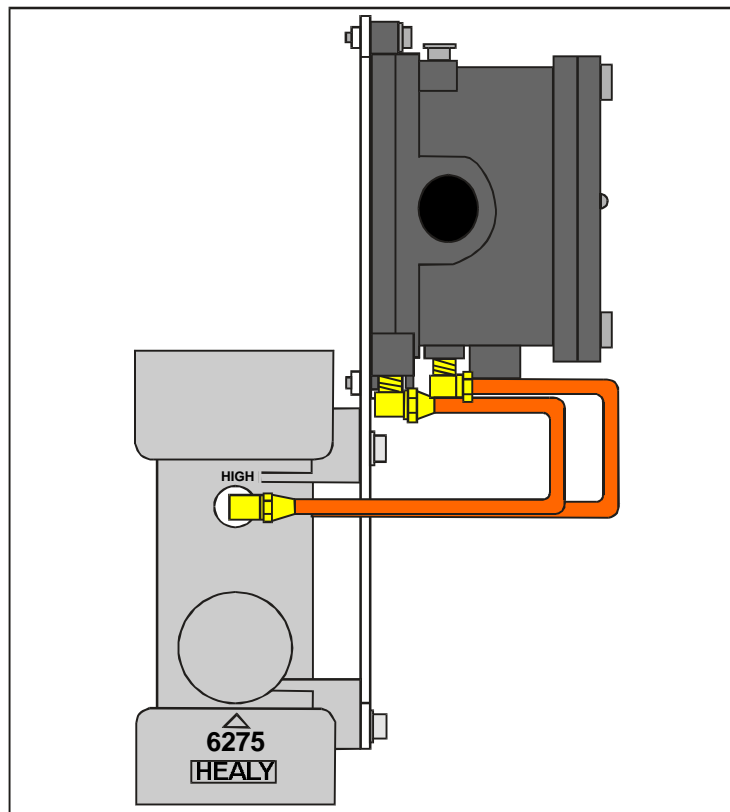

6275 System Monitor Vent Sensor. The 6275 Vent Sensor is mounted on top of the manifolded vent pipes below the **+1.5" W.C. Pressure Vent Valve** usually outside the building (see Exhibit 2 Figure 4F). Two wires (16 or 18 AWG) from the **SMCB** exit the building through a sealed conduit (per NEC). These wires must be 600 volt rated, Class 1 type insulation. They connect to the switch terminals common (COM.) and normally open (NO) inside the **62755 Vent Sensor Switch** which is an integral part of the Vent Sensor Assembly. See Healy Systems wiring diagram 9200-6308 (REV 4) sheets 1 and 2 for general layout and installation requirements.